

MARION COUNTY SURVEYOR'S OFFICE


SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 32 TWN. 15_N RNG. 3_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 10-12-09
Party Chief: Wilcoxen
Crew: Finney
Type of Marker: Capped Rebar
Method of Establishment: County: 1-3-1980
IN S.P.C. E Zone, NAD 83
Name: 15033208
N: 493 451.920 3(m)
E: 52 132.756 2(m)


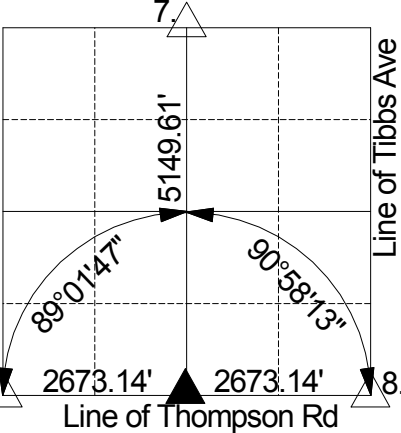


Section Line 5000 S

450'+/-

1.

White River

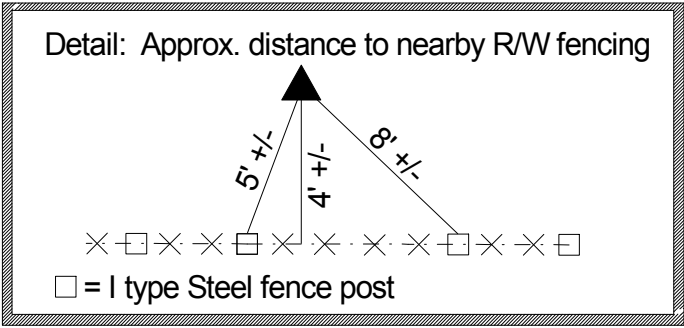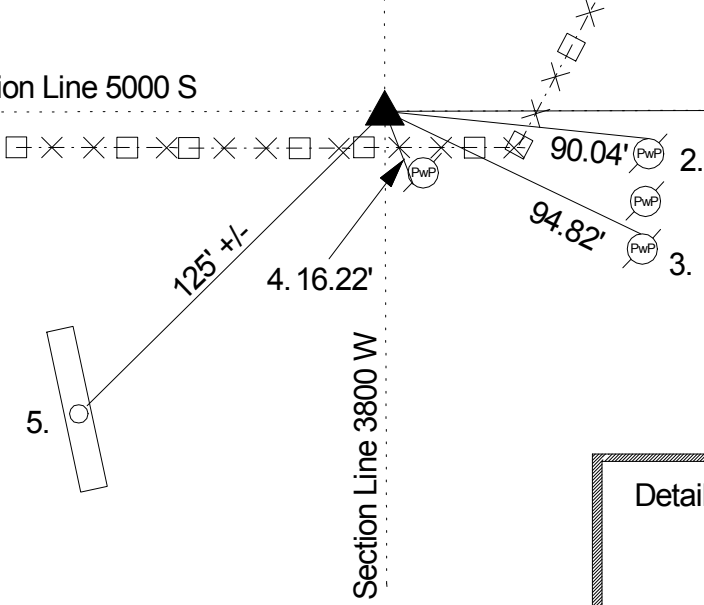

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 14" ash bearing S 73 E 23 links; and a 10" buckeye bearing S 11 E 10 links (Marion County Atlas p. 6). A survey by D.B. Hasbrook on 4/4/1859 indicates a set corner post with the following witness: 36" walnut bearing S 4.50 W 88 links (Perry legal Book p. 35). A survey by W. P. Smith on 7/10/1866 indicates a 48" sycamore on the E, W and S sides for use as the corner (Decatur Legal Book p. 9). In December 1979 MCSO noted on tie that dimensions and angles were from a traverse of 32-15-3. Corner referenced by Wilcoxen on 1/3/1980 and called a rebar with aluminum cap. Corner referenced by Wilcoxen on 4/24/81 and called a rebar with aluminum cap. Corner referenced by Wilcoxen on 9/10/1996 and called a capped rebar. Corner referenced by Wilcoxen on 10/12/2009 and called a capped rebar.

REF.	DISTANCE	DESCRIPTION
1.	450'+/-	Approx. Distance due E to White River bank
2.	90.04'	Lg road nail N PwP #36-689 40" up
3.	94.82'	Lg road nail N PwP #34-689 40" up
4.	16.22'	Lg road nail SW PwP #37-689 50" up
5.	125' +/-	Face of billboard pole
		Note: Dimensions and Angles are from a traverse of 32-15-3 Dec 1979 by MCS
6.	2673.14'	Due W to 15033207(SW corner) (boat spike w/washer) 1996
7.	5149.61'	Due N to 15033202 (N quarter corner) (5/8" rebar w/alum. cap) 1980
8.	2673.14'	Due E to 15033209 (SE corner) (5/8" rebar w/alum. cap) 1996